


DEMOLITION BOOM

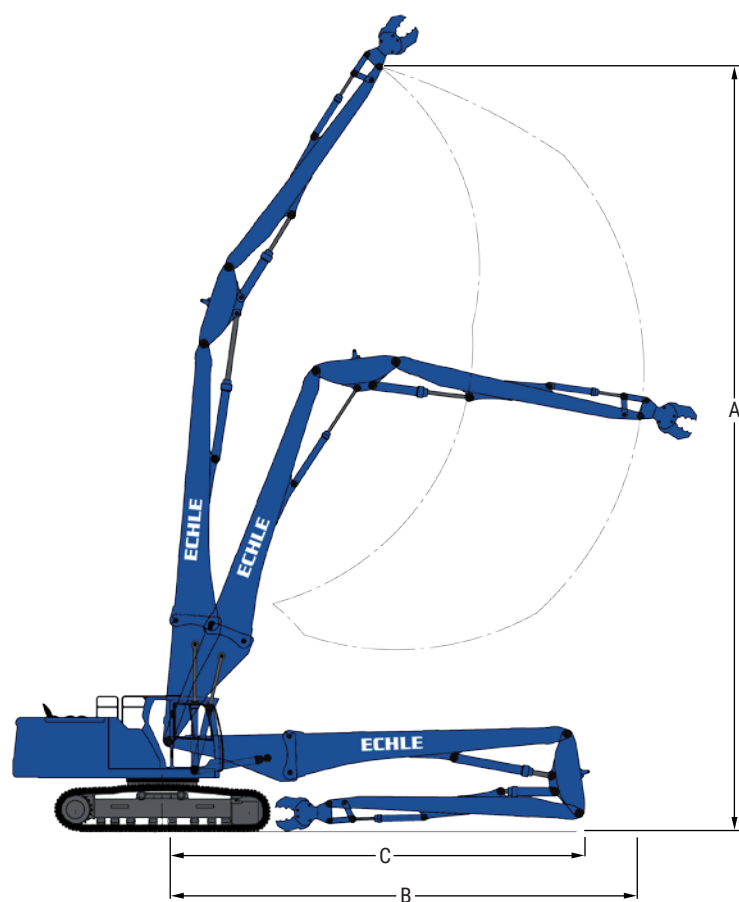

| Description | Excavator operating weight | | |
|---------------------------------|----------------------------|---------|---------|
| | 27-32 t | 32-40 t | 40-50 t |
| A Max. centre height (m) | 18,0 | 21,0 | 25,0 |
| B Max. reach (m) | 11,0 | 13,0 | 15,5 |
| C Transport length (m) | 9,0 | 11,0 | 13,5 |
| Permitted tool weight* (t) | 2,0 | 2,2 | 2,6 |
| Additional counterweight* (t) | 3,0 | 4,0 | 5,0 |

* Attachments can be modified according to the basic machine.

The above specifications are for reference only, actual working range may vary between machine models.

For the benefit of continuous product improvement, specifications are subjected to change without prior notice.

 echlehartstahl

 echle_hartstahl

 echle-hartstahl

 echle_hartstahl

 EchleHartstahl

ECHLE Hartstahl GmbH
Untere Zinne 6
77709 Wolfach / Germany
T: +49 7834 86 559 - 0

info@echle.de
www.echle.de
www.cm-parts.com

ECHLE[®]
Intelligente Lösungen für Baumaschinen

ADDITIONAL PRODUCTS FOR DEMOLITION MACHINES

Demolition work requires precision and the correct handling of heavy equipment. Construction sites are often confusing and the danger of debris or structural weaknesses is always present. Safety precautions are therefore essential.

In addition to protecting workers and machines, it is also important to optimise the day-to-day work of machine operators. Ergonomic machine operation, modern control

systems and improved visibility make work easier, reduce physical strain and increase productivity.

With our products, you can rely on safety, protection and durability - for you and your machine!

